



Scientific Inquiry and Review (SIR)

Volume 3, Issue 4, December 2019

ISSN (P): 2521-2427, ISSN (E): 2521-2435

Journal DOI: <https://doi.org/10.32350/sir>

Issue DOI: <https://doi.org/10.32350/sir.34>

Homepage: <https://ssc.unt.edu.pk/sir/Home.aspx>

Journal QR Code:



Article

MHD Boundary Layer Flow and Heat Transfer of Nano fluid over a Vertical Stretching Sheet in the Presence of a Heat Source

Author(s)

Zameer Abbas Sohaib Abdal Fayyaz Hussain
Nasir Hussain Muhammad Adnan
Bagh Ali Rana Muhammad Zulqarnain
Liaqat Ali Saba Younas

Online Published

December 2019

Article DOI

<https://doi.org/10.32350/sir.34.05>

Article QR Code



Zameer Abbas

To cite this article

Abbas Z, Abdal S, Hussain F, Hussain, et al. MHD boundary layer flow and heat transfer of Nanofluid over a vertical stretching sheet in the presence of a heat source. *Sci Inquiry Rev.* 2019;3(4):60–73.

[Crossref](#)

Copyright Information

This article is open access and is distributed under the terms of Creative Commons Attribution – Share Alike 4.0 International License.



A publication of the
School of Science, University of Management and Technology
Lahore, Pakistan.

Indexing Agency



MHD Boundary Layer Flow and Heat Transfer of Nanofluid over a Vertical Stretching Sheet in the Presence of a Heat Source

Zameer Abbas¹, Sohaib Abdal^{2*}, Fayyaz Hussain¹, Nasir Hussain¹,
Muhammad Adnan¹, Bagh Ali³, Rana Muhammad Zulqarnain²,
Liaqat Ali⁴, Saba Younas¹

¹Department of Mathematics, National College of Business
Administration & Economics, Lahore, Pakistan

²School of Mathematics, Northwest University, Xi'an, China

³Department of Applied Mathematics, Northwestern Polytechnical
University, Xi'an, China

⁴School of Energy and power, Xi'an Jiaotong University, Xi'an, China

*sohaib@stumail.nwu.edu.cn

Abstract

The nanoparticles used in nanofluid are prepared for carbides and oxides. In this paper, a nanofluid flow over a stretching sheet in the presence of viscous dissipation, heat source, and magnetic field was numerically explored with the help of the Runge-Kutta shooting technique and the effects of various parameters were analyzed using graphical representation.

Keywords: buoyancy assisting, buoyancy opposing, MHD Boundary Layer Flow, nanofluid, Runge-Kutta shooting technique

Introduction

Nanofluid contains a nanometer sized metallic component in base fluid particles. The nanoparticles used in nanofluid are typical, same as those prepared for carbides and oxides. Afridib et al. [1] considered MHD stagnation point flows over a stretching sheet. Alawi et al. [2] focused on determining and modelling the forceful thermal conductivity and viscosity of nanofluid. Ali et al. [3] enhanced the thermophysical heat transference fluid. Awaludin et al. [4] studied the effects of MHD stagnation point fluid over a stretching sheet. Baag et al. [5] investigated heat transfer and boundary layer flow of MHD on a stretching sheet. Bhatti et al. [6] described the flow of a shrinking sheet of MHD. Chaudhary et al. [7] analysed the viscous flow of a shrinking surface in a porous medium. Ganesh et al. [8] analyzed the influence of non-linear thermal radiation on boundary layer flow and convective heat transference of Al_2O_3 nanofluid.

Ghan et al. [9] discussed an incompressible and unidirectional MHD flow of fluids on an oscillating in-clines belt embedded in the porous medium. Hamid et al. [10] discussed the influence of Williamson fluid. Ishaq et al. [11] investigated two dimensional nanofluid flow over a stretching sheet. Kumar et al. [12] studied the numerically unsteady flow of melting heat transference of nanofluids over a stretched sheet. Kamal et al. [13] investigated the MHD stagnation point draw of a nanofluid at a permeable stretching sheet with chemical attitude effect. Kumar et al. [14] studied the unsteady hydromagnetic boundary layer stagnation point nanofluid flow over a non-linear stretching surface. Kumar et al. [15] discussed MHD on the stretching surface. Maripala [16] investigated the nanofluid flow in the occurrence of radiations.

Mahmood et al. [17] examined the axisymmetric fluid on a disc. Makinde et al. [18] investigated the steady MHD nanofluid boundary layer flow over a non-linear stretching sheet. Nojoomizadeh et al. [19] numerically investigated the heat transfer and laminar flow with a previous medium. Reddy and Krishna [20] described the unstable flood of the transversely magnetic field of constant strength. Shaba and Ali [21] investigated the problems of hydromagnetics boundary layer flow of a dusty fluid over a stretching sheet. Singh et al. [22] investigated MHD slip flow over a flat platter. Waqas et al. [23] described the idea of computation to investigate for buoyance and radiation effect on the MHD stagflation points of micropolar fluid. Wen et al. [24] studied the natural carbon dioxide (Co_2), the field at low pressure (below 1 MPa) in a closed system. Younas et al. [25] studied external heat and radiated heat sources. Zaib et al. [26] discussed the axisymmetric flood of homogeneous-heterogeneous reactional. Sohaib et al. [27] obtained the numerical solution for radiation on hydromagnetic stagnation point flow.

According to the best knowledge of the author, the numerical study of the effect of heat and boundary layer flow on steady convection flow and heat transfer past a vertical stretching sheet is not available. Energy and momentum equations are obtained with the help of similarity variables. The governing partial differential equations are transmuted into ordinary differential equations and numerically solved by using Runge-Kutta shooting technique. The effects of various parameters are analyzed using their graphical representation.

2. Problem Description

In this study, the vertical stretching sheet is in the direction of the x-axis

and the y-axis is orthogonal to the sheet. u is the velocity component in the x-direction and v is the velocity component in the y-direction. Taking into consideration c which is a positive constant; $u = u_e(x) = ax$ represents the unrestricted stream velocity, while $u = u_w(x) = cx$ represents the velocity when there is stretching on the sheet. When a heat source / sink is present, H_0 is an external magnetic field that is practically perpendicular to the sheet. The principal equations of continuity, momentum, and energy are written as follows,

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (1)$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = -\frac{1}{\rho} \frac{dp}{dx} + \nu \frac{\partial^2 u}{\partial y^2} - \frac{\sigma \mu_e^2 H_0^2}{\rho} u + g\beta (T - T_\infty) \quad (2)$$

$$u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \frac{k}{\rho c_p} \frac{\partial^2 T}{\partial y^2} + \frac{Q}{\rho c_p} (T - T_\infty) + \tau \left(D_B \frac{\partial C}{\partial y} \frac{\partial T}{\partial y} + \frac{D_T}{T_\infty} \left(\frac{\partial T}{\partial y} \right)^2 \right) \quad (3)$$

$$u \frac{\partial C}{\partial x} + v \frac{\partial C}{\partial y} = D_B \frac{\partial^2 C}{\partial y^2} + \frac{D_T}{T_\infty} \frac{\partial^2 T}{\partial y^2} \quad (4)$$

where D_B is Brownian diffusion, D_T is Thermophoresis diffusion, σ is electrical conductivity, μ_e is magnetic permeability, T_∞ is the temperature of free stream, g is the acceleration due to gravity, β is the volumetric coefficient of thermal expansion, k is thermal conductivity, $\nu = \frac{\mu}{\rho}$ is the kinematic viscosity, and $T_w = T_\infty + bx$ is the temperature of the sheet. $C_w = C_\infty + bx$, τ is the ratio of heat capacities.

The boundary conditions pertaining to the horizontally moving boundary and convective heat transfer at the wall are formulated below.

$$v = 0, u = u_w(x) = cx, -k \frac{\partial T}{\partial y} = h_f (T_f - T), C = C_w \text{ at } y = 0 \quad (5)$$

$$u = u_e(x) = ax, T = T_\infty, C = C_\infty \text{ as } y \rightarrow \infty,$$

3. Similarity Analysis

The subsequent change and dimensionless quantities are used into equations while taking into account the boundary conditions.

We have

$$\eta = \sqrt{\frac{a}{\nu}} y, \psi = x \sqrt{a \nu} f(\eta), \phi(\eta) = \frac{C - C_\infty}{C_w - C_\infty}, \theta(\eta) = \frac{T - T_\infty}{T_w - T_\infty} \quad \text{and}$$

$$u = \frac{\partial \psi}{\partial y}, v = -\frac{\partial \psi}{\partial x} \quad (6)$$

$$u = xa f'(\eta), \quad v = -\sqrt{av} f(\eta).$$

The equation of continuity satisfies equations (2-4) and transforms them as shown below.

$$f''' + ff'' - f'^2 + 1 + H_a^2(1 - f') + \lambda\theta = 0 \quad (7)$$

$$\theta'' + pr[f\theta' - f'\theta + \delta\theta + N_b\theta'\Phi' + N_t\theta'^2] = 0 \quad (8)$$

$$\Phi'' + Le(f\Phi' - f'\Phi) + \frac{Nt}{Nb}\theta'' = 0 \quad (9)$$

The boundary conditions (5) become

$$f = 0, f' = \frac{c}{a} = A, \theta' = B(\theta - 1), \phi = 1 \text{ at } \eta = 0 \quad (10)$$

$$f' = 1, = 0, \phi = 0 \text{ as } \eta \rightarrow \infty.$$

$H_a = \mu_e H_o \sqrt{\frac{\sigma}{\rho a}}$ is the Hartmann number, $\lambda = \frac{Gr_x}{Re_x^2}$ is the mixed convection parameter,

$Gr_x = g\beta(T_w - T_\infty)\frac{x^3}{\nu^2}$ is the local Grashof number, $Re_x = u_e(x)\frac{x}{\nu}$ and

$$p_r = \frac{\nu}{\alpha},$$

$\delta = \frac{Q}{\rho a C_p}$ represents the factor of heat generation or absorption. $L_e =$

$\frac{\nu}{D_B}$ is the Lewis number parameter, $N_b = \tau D_B \frac{bx}{\nu}$ is the

Brownian motion parameter, and $N_t = \tau \frac{DT}{T_\infty} \frac{bx}{\nu}$ is the Thermophoresis parameter.

4. Results and Discussion

A steady laminar flow above a vertical stretching sheet with the existence

of viscous dissipation, heat sink or source, and magnetic field was explored numerically with the help of the Runge-Kutta shooting technique. physical parameter effects L_e , N_b , N_t , Hartmann number, stretching velocity ratio, Biot number and velocity distribution along with skin friction and heat transfer coefficient.

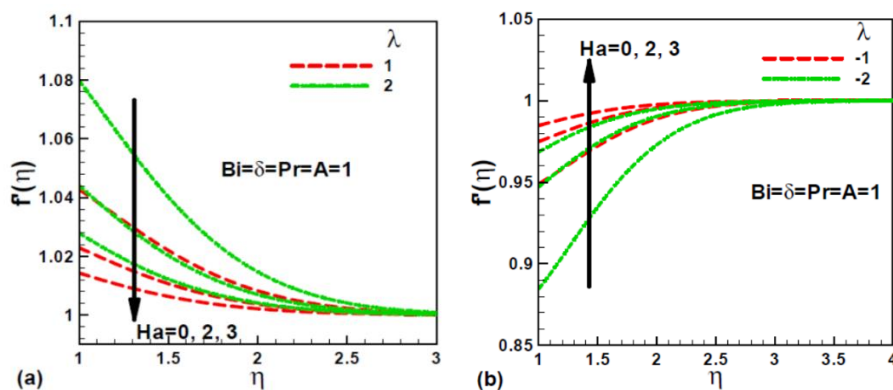
In Table 1, numerical comparison of the values of Pr for heat transformation is obtained by using the Runge-Kutta shooting scheme. The skin friction coefficient is compared with previously studied results in Table 2. In Figure 1, the effect of Ha on velocity for opposing and assisting flow is shown ($N_b = N_t = L_e = 0$). Figure 2 shows the effects of A when stretching is in flow in the opposite direction ($N_b = N_t = L_e = 0$). In Figure 3, the effects of Bi in the presence of a heat source on the dimensionless temperature for assisting and opposing flow can be seen. A similar effect for Bi can be seen in Figure 4 which illustrates the result of the Biot number in the company of heat sink on dimensionless temperature for assisting and opposing flow at $P_r = H_a = A$ ($N_b = N_t = L_e = 0$). Figure 5 displays the effects of stretching velocity ratio and mixed convection parameter on dimensionless skin friction for both assisting and opposing flow. It is found that skin friction increases with the mixed convection parameter and H_a , even though it drops with the stretching velocity ratio for mutually opposing and assisting flow ($N_b = N_t = L_e = 0$). The effects of Biot number B_i , heat generation / absorption coefficient δ , and mixed convection parameter λ on the dimensionless heat transfer rate for both assisting and opposing flow are illustrated respectively in Figure 6 ($N_b = N_t = L_e = 0$). The effects of Brownian motion N_b in the presence of heat source on the dimensionless temperature for assisting and opposing flows are shown in Figure 7, respectively ($N_t = 0.1, 0.2$) ($L_e = 0.1, 0.5$). Figure 8 illustrates the result of Thermophoresis N_t in the company of heat sink on the dimensionless temperature for assisting and opposing flow at $P_r = H_a = A$ ($N_b = 0.1, 0.2$) ($L_e = 0.1, 0.5$). The effects of Lewis number L_e and λ for both assisting and opposing flow are illustrated respectively in Figure 9 ($N_t = 0.1, 0.2$) ($N_b = 0.1, 0.5$).

Table 1. Numerical Comparison of $\theta'(0)$ for Pr

Pr	Liaqat et al. [29]	Sohaib et al. [28]	Our Results
0.72	0.8086	0.80863	0.80866
1.00	1.0000	1.00000	1.00000
3.00	1.9236	1.92367	1.92376
10.0	3.7206	3.72066	3.72084
100	12.2946	12.29405	12.29452

Table 2. Numerical Comparison of $-f''(0)$ for M

M	Bagh et al. [31]	Liaqat et al. [30]	Our Results
0.0	1.0000080	1.0000078	1.0000196
0.2	1.0954458	1.0954462	1.0954480
0.5	1.2247446	1.2247452	1.2247476
1.0	1.4142132	1.4142142	1.4142192
1.2	1.4832393	1.4832385	1.4832416
1.5	1.5811384	1.5811392	1.5811402
2.0	1.7320504	1.7320515	1.7320522

**Figure 1.** Impact of Ha and Bi on velocity for supporting and conflicting flow

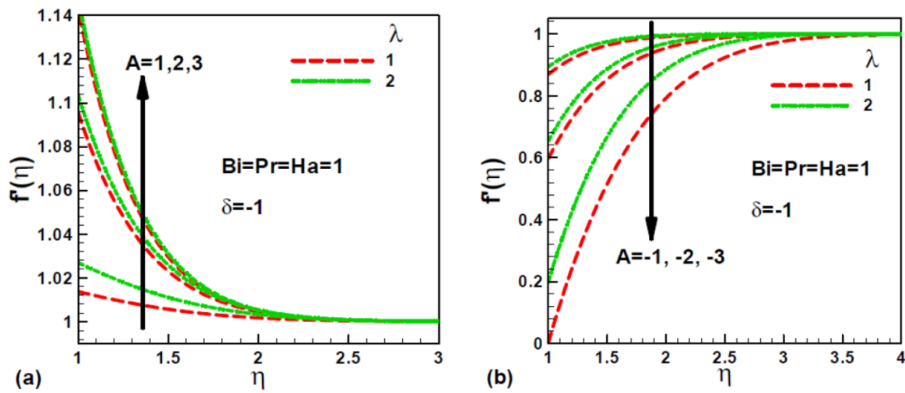


Figure 2. Impact of A and Bi on velocity for supporting and conflicting flow

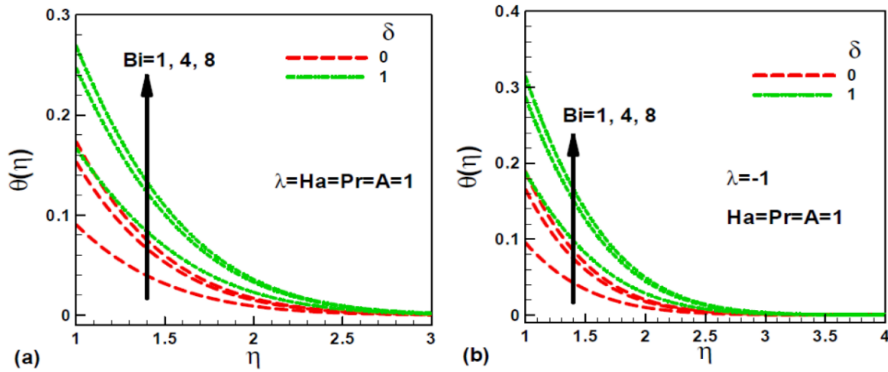


Figure 3. Impact of Bi and δ on temperature for supporting and conflicting flow

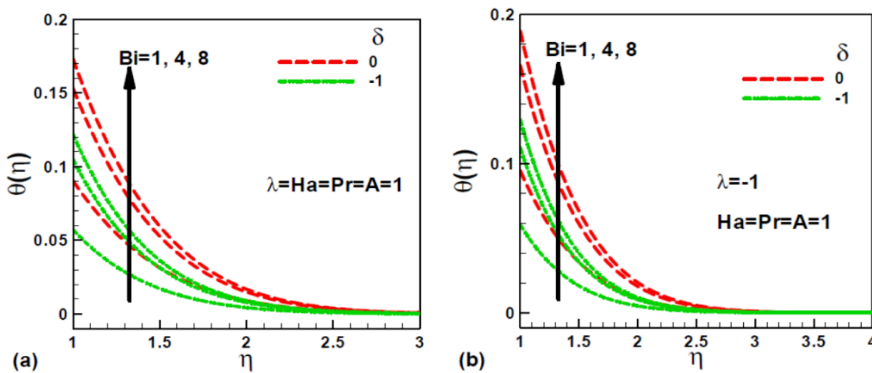


Figure 4. Impact of Bi and λ on temperature for supporting and conflicting flow

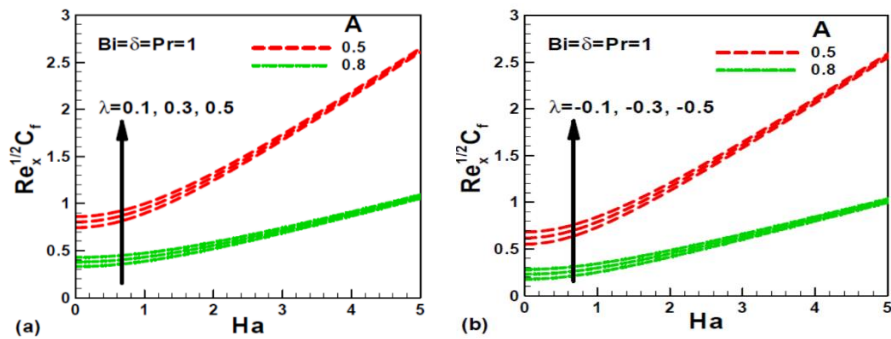


Figure 5. Impact of A and λ on temperature for supporting and conflicting flow

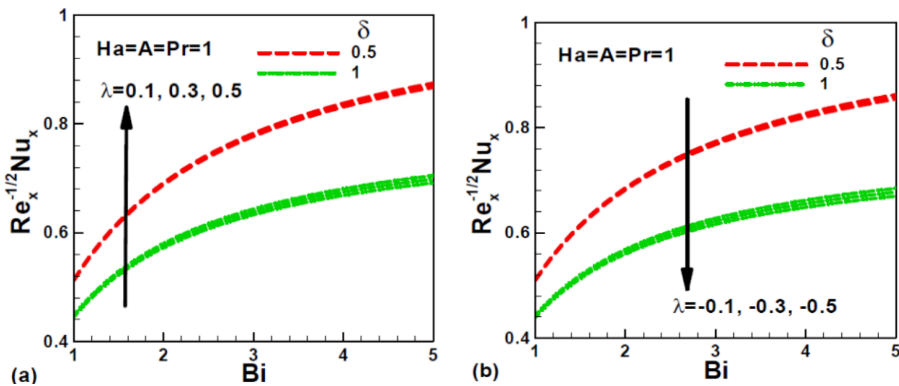


Figure 6. Impact of λ and δ on temperature for supporting and conflicting flow

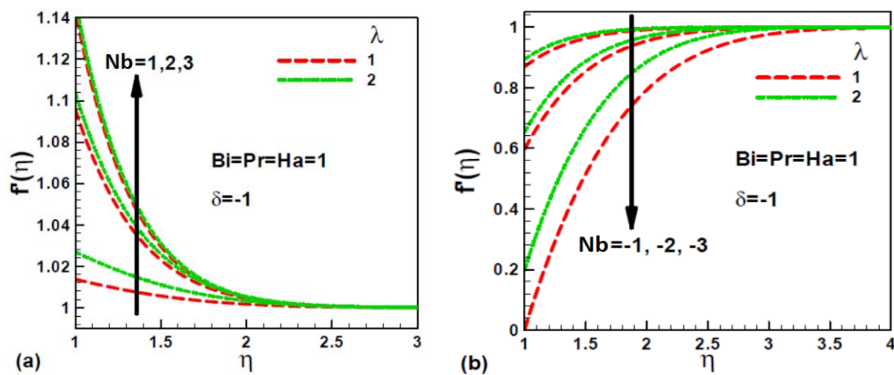


Figure 7. Impact of Nb and λ on temperature for supporting and conflicting flow

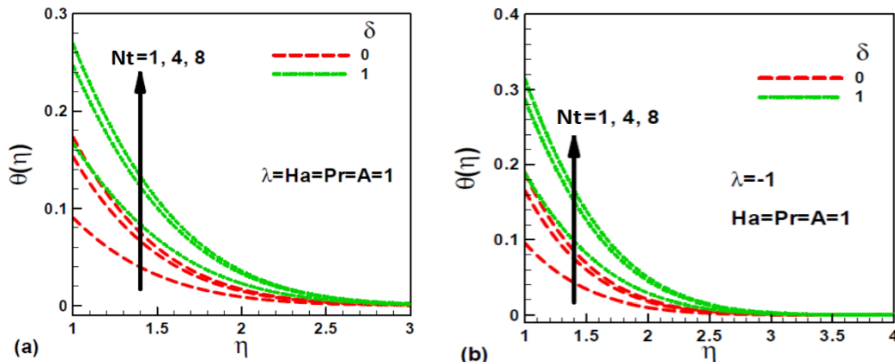


Figure 8. Impact of Nt and δ on temperature for supporting and conflicting flow

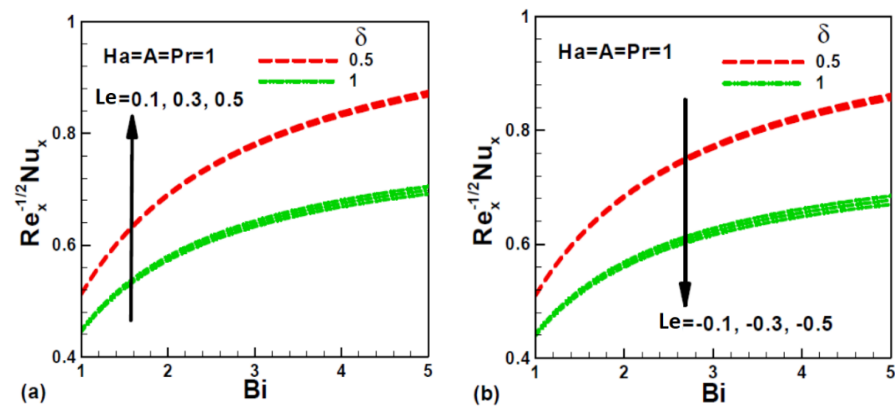


Figure 9. Impact of Le and δ on temperature for supporting and conflicting flow

5. Conclusion

A nanofluid flow over a stretching sheet in the presence of viscous dissipation, heat source, and magnetic field was numerically explored with the help of the Runge-Kutta shooting technique. The effects of the specific parameters that influence the temperature and velocity distribution were noticed. Some notable observations are outlined as follows.

- The increase in H_a and λ causes an increase in the velocity profile; however, an opposite behavior is demonstrated for A .
- The heat transfer coefficient increases buoyancy assisting and it decreases buoyancy opposing.

- The non-dimensional velocity decreases by increasing the Hartmann number for buoyancy assisting but an opposite effect is seen for buoyancy opposing flow.
- Temperature profile increases with the increase in N_t .
- Temperature rises as Bi increases.

References

- [1] Afridib IM, Qasim BM, Khana I, Tlili I. Entropy generation in MHD mixed convection stagnation-point flow in the presence of joule and frictional heating. *Case Studies in Therm Eng.* 2018;12:292–300.
- [2] Alawi A, Sidik CAN, Xian WH, Kean HT, Kazi NS. Thermal conductivity and viscosity models of metallic oxides nanofluids. *Int J Heat and Mass Transfer.* 2018;116:1314–1325.
- [3] Ali N, Teixeira AJ, Addali A. A review on nanofluid: fabrication, stability, and thermophysical properties. *Hindawi J Nanomate.* 2018:33.
- [4] Awaludin SI, Ishak A, Pop I. Stagnation point flow over a permeable stretching/shrinking sheet with chemical reaction and heat source/sink. *Comput Modeling Eng Sci.* 2019;120(1):203–214.
- [5] Baag S, Mishra RS, Hoque MM, Anika NN. Magnetohydrodynamic boundary layer flow over an exponentially stretching sheet past a porous medium with uniform heat source. *J Nanofluids.* 2018;7:1–7.
- [6] Bhatti MM, Abbas AAM, Rashid MM. A robust numerical method for solving stagnation point flow over a permeable shrinking sheet under the influence of MHD. *Appl Math Comput.* 2018;316:381–389.
- [7] Chaudhary S, Singh S, Chaudhary S. Numerical solution for magnetohydrodynamic stagnation point flow towards a stretching or shrinking surface in a saturated porous medium *Int J Pure Appl Math.* 2016;106(1):141–155.
- [8] Ganesh VN, Kameswaran KP, Mdallal AMQ, Haneem AKA, Ganga B. Non-linear thermal radiative maranon boundary layer flow of gamma Al_2O_3 nanofluid past a stretching sheet. *J Nanofluids.* 2018;7:1–7.
- [9] Ghan F, Gul T, Islams S, Shah AR, Khan I, Sherida S, Nasir S, Khan AM. Unsteady magnetohydrodynamics thin film flow of a third

- grade fluid over an oscillating inclined belt embedded in a porous medium. *Therm Sci.* 2016;5:875–887.
- [10] Hamid M, Usman M, Haq R, Khan Z, Wang W. Wavelet analysis of stagnation point flow of non-Newtonian nanofluid, *Appl Math Mech Engl.* 2019;40(8):1211–1226.
- [11] Ishaq M, Ali G, Shah AIS, Shah Z, Muhammad S, Hussain AS. Nanofluid film flow of eyring Powell fluid with magneto hydrodynamic effect on unsteady porous stretching sheet. *J Math.* 2019;51(2):131–153.
- [12] Kumar GK, Gireesha JB, Rudraswamy GN, Krishnamurthy RM. An unsteady flow and melting heat transfer of a nanofluid over a stretching sheet embedded in a porous medium. *Int J Appl Mech Eng.* 2019;24(2):245–258.
- [13] Kamal F, Zaimi K, Ishak A, POP I. Stability analysis of MHD stagnation point flow towards a permeable stretching/shrinking sheet in a nanofluid with chemical reactions effect. *Sains Malays.* 2019;48(1):243–250.
- [14] Kumar VG, Kumar KSSMVR, Varma KVS, Unsteady magnetohydrodynamics stagnation point flow of a nanofluid over a slendering stretching sheet using buongiorno's model. *Int J Res Ind Eng.* 2018;7(1):84–105.
- [15] Kumar AK, Sugunamma AK, Sandeep VN. Impact of non-linear radiation on MHD non-aligned stagnation point flow of micropolar fluid over a convective surface. *J Non-Equilib Thermodyn.* 2018;43(4):327–345.
- [16] Maripala SNK. Unsteady MHD flow and heat transfer of nanofluid over a permeable shrinking sheet with thermal radiation and chemical reaction. *Am J Eng Res (AJER).* 2015;4(6):68–79.
- [17] Mahmood K, Sajid M, Ali N, Javed T. Heat transfer analysis in the time dependent axisymmetric stagnation point flow over a lubricated surface. *Therm Sci.* 2018;22(6a):2483–2492.
- [18] Makinde DO, Mabood F, Ibrahim SM. Chemically reacting on MHD boundary-layer flow of nanofluids over a non-linear stretching sheet with heat source/sink and thermal radiation. *Therm Sci.* 2018;22(1):495–506.

- [19] Nojoomizadeh M, Karimipour A, Firouzi M, Afrand M. Investigation of permeability and porosity effects on the slip velocity and convection heat transfer rate of Fe_3O_4 /water nanofluid flow in a microchannel while its lower half filled by a porous medium. *Int J Heat Mass Transfer*. 2018;119:891–906.
- [20] Reddy RVG, Krishna HY. Numerical solutions of unsteady MHD flow heat transfer over a stretching surface with suction or injection. *Fluid Dyn Mater Process*. 2018;14(3):213–222.
- [21] Shaba MD, Ali A. Hydromagnetics boundary layer flow of a dusty fluid in a porous medium over a stretching sheet with slip effect. *Malays J Fundam Appl Sci*. 13 (3) (2017) 170–173.
- [22] Singh P, Pandey KA, Kumar M. Forced convection in MHD slip flow of alumina-water nanofluid over a flat plate. *J Enhanced Heat Ttransfer*. 2016;23(6):487–497.
- [23] Waqas H, Hussain S, Khalid S. Radiation and buoyancy effects on MHD stagnation point flow of micropolar fluids due to a porous stretching sheet. *Phys Comput Sci*. 2017;54(2):157–165.
- [24] Wen B, Akhbari D, Zhang L, Hesse AM. Convective carbon dioxide dissolution in a closed porous medium at low pressure. *J Fluid Mech*. 2018;854:56–87.
- [25] Younas S, Hussain S, Abdal S, Habib D. Computational study for megnetohydrodynamics buoyancy flow vertical permeable plate with chemical diffusion and thermal radiation. *Sci Int*. 2018;30(2):193–197.
- [26] Zaib A, Khan M, Shafie S. Boundary-layer flow of a cu-water nanofluid over a permeable shrinking cylinder with homogenous-hetrogenous reactions. *Therm Sci*. 2019;23(1):295–306.
- [27] Abdal S, Hussain S, Ahmad F, Ali B. Hydromagnetic stagnation point flow of micropolar fluids due to a porous stretching surface with radiation and viscous dissipation effects. *Sci Int*. 2015;27(5):3965–3971.
- [28] Abdal S, Ali B, Younas S, Ali L, Mariam A. Thermo-Diffusion and multislip effects on MHD mixed convection unsteady flow of micropolar nanofluid over a shrinking/stretching sheet with radiation in the presence of heat source. *Symmetry*. 2019;12(1):49–65.

- [29] Ali L, Liu X, Ali B, Mujeed S, Abdal S. Finite element simulation of multi-slip effects on unsteady MHD bioconvective micropolar nanofluid flow over a sheet with solutal and thermal convective boundary conditions. *Coatings*. 2019;9(12):842–862.
- [30] Ali L, Liu X, Ali B, Mujeed S, Abdal S. Finite element analysis of thermo-diffusion and multi-slip effects on MHD unsteady flow of casson nano-fluid over a shrinking/stretching sheet with radiation and heat source. *Appl Sci*. 2019;9(23):5217–5237.
- [31] Ali B, Nie YF, Khan SA, Sadiqb MT, Tariq M. Finite element simulation of multiple slip effects on MHD unsteady maxwell nanofluid flow over a permeable stretching sheet with radiation and thermo-diffusion in the presence of chemical reaction. *Processes*. 2019;7(9):628–651.